


Sundance® Spas 880 Marin®


Specifications

Dimensions:	76" x 91" x 34" (193.04 cm x 231 cm x 86.36 cm)
Seating Capacity:	4-5 Adults
Dry Weight:	838 lbs (380 kg)
Filled Weight (Average Fill):	3,465 lbs (1,572 kg)
Water Capacity (Average Fill):	315 US Gal (1,192 Liters)
Controls:	880 Touchscreen Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features
Water Delivery:	2 TheraMax High-Flow Pumps and 8-Hour Dynamic Flow Circulation System
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 3:	High Output Dynamic Flow, 24-Hour programmable, factory default set to 8-Hour Filter/ Circulation Pump (35 gpm) Programmable for Daily Start Time and Duration
Total Hydrojets:	45
Seat A Jets:	6 Fluidix Reflex, 2 Vortex, 2 Fluidix Nex, 6 Focus-Relief®
Seat B Jets:	2 Vortex, 4 Focus-Relief
Seat C Jets:	2 Fluidix Nex, 12 Fluidix ST, 2 Accu-Pressure
Seat D Jets:	2 Fluidix Nex, 2 Fluidix Intelli-Jet, 1 Fluidix PT
Footwell Jets (E):	2 Vortex
Air Blower:	High-Efficiency, 1-Speed
Aromatherapy Delivery:	4 Air Injector Jets with Quiet High Speed Air Pump
Air Controls/Massage Selectors:	4/1 (Standard air control with LED lights and massage selector with LED lights)
Filter:	MicroClean® Ultra II Filtration System, 130 ft² (2 interlocking cartridge filters)
Water Treatment:	Dynamic Flow Circulation System; Factory installed ClearRay Active Oxygen® System Export: ClearRay Active Oxygen® System
Lighting:	Multi-Colored LED Lighting System (1 Waterfall, 1 Underwater, 4 Air controls, 1 Massage Selector); Exterior lighting (white only)
Skirt Cabinet (SunSide™):	Windy Oak, Ironwood and Flint Gray
Shell Colors:	Platinum, Celestite, Monaco, Midnight, Travertine
Handrails:	1 Integral
Headrests:	Four, 1-Piece Gray
Heater:	North America (60 Hz): Hi Flow 5.5 kW with Titanium Element Export (50 Hz): Hi Flow 2.7 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A or 60A; Export (50 Hz): 230-240 VAC@1x32A or 1x16A/1x20A, 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 2 premium speakers and a powered subwoofer
Special Features:	Optional (Factory Installed) SmartTub® Module, Optional Inductive Charger, Optional Spa Sense™ System



Sundance Spas 880 Marin


Operation/Seat Depths

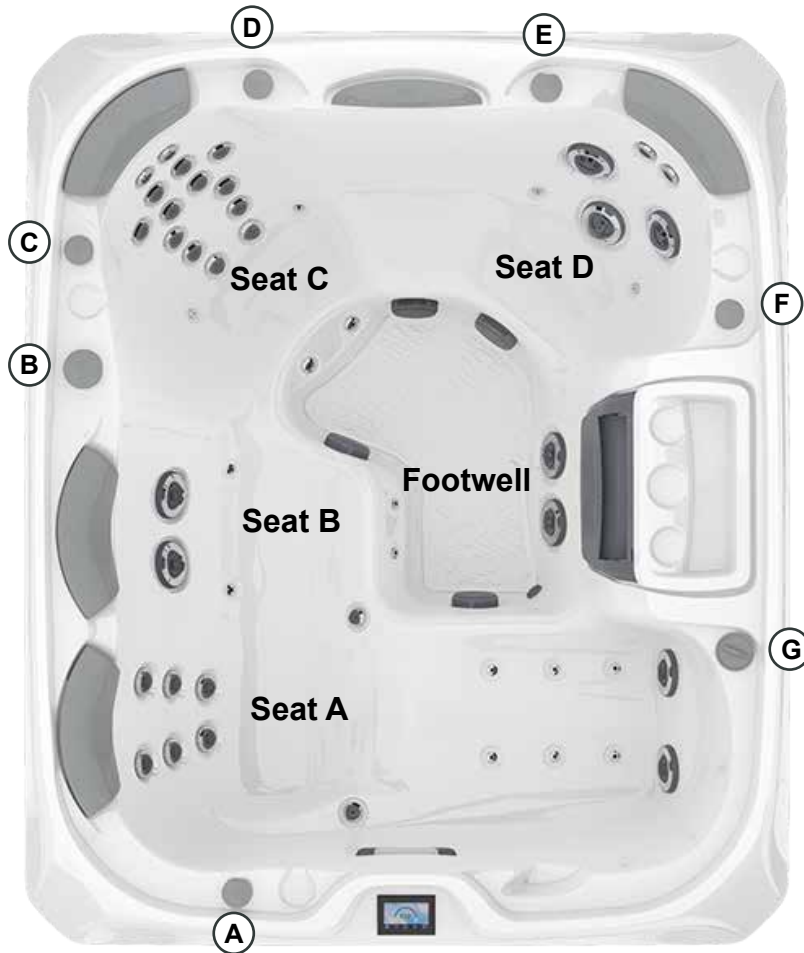

- (A)** Air Control - Activates Seat A Jets (6 Fluidix Reflex, 2 Fluidix Nex, 2 Vortex)
- (B)** Massage Selector [Pump 1] - Adjusts Massage Level Between Seat A Jets and Seat C Jets
- (C)** Air Control - Activates Upper Eight Seat C Jets (2 Fluidix Nex, 6 Fluidix ST)
- (D)** Air Control - Activates Lower Eight Seat C Jets (6 Fluidix-ST, 2- Accu-Pressure)
- (E)** Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
- (F)** Air Control - Activates Seat B Jets (2 Vortex) + Seat D Jets (2 Fluidix Nex, 2 Fluidix Intelli-Jet, 1 Fluidix PT) + Footwell Jets (2 Vortex)
- (G)** Sunscent Dispenser

- Jets Pump 2: Seat B Jets + Seat D Jets + Footwell Jets are always on when this pump is running
- Focus-Relief Jets: Work with both the blower and Jets Pump 1 and Pump 2. The blower introduces air to the jet and the Jets Pump forces water through.

45 Total Jets

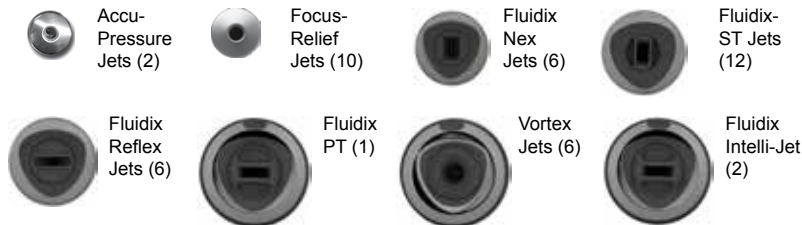


Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 25.75" (65.41 cm)
B = 24.50" (62.87 cm)
C = 28.00" (71.12 cm)
D = 22.00" (55.88 cm)

E = 25.00" (63.50 cm)
F = 19.00" (66.04 cm)
G = 30.00" (76.20 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**

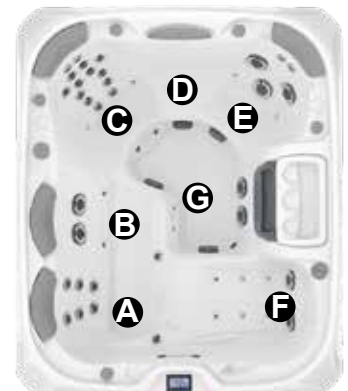


Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Marin


Portable Dimensions

TOP VIEW

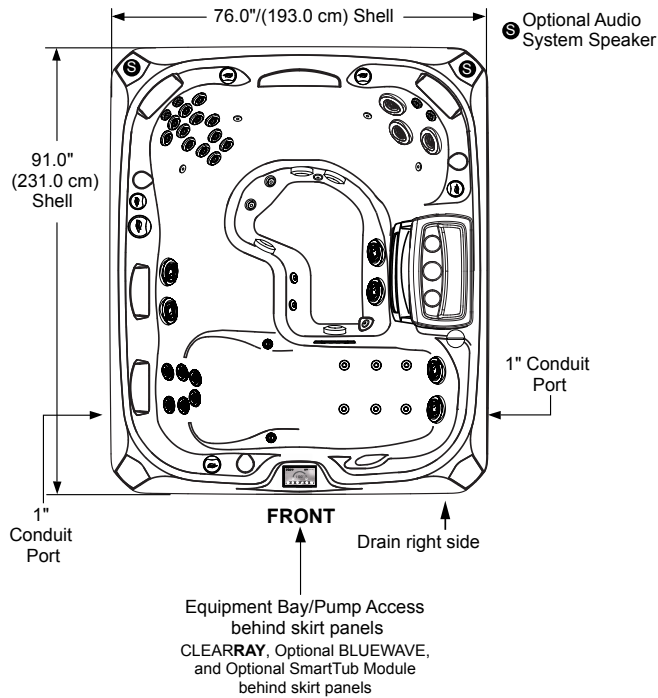


FRONT/BACK VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

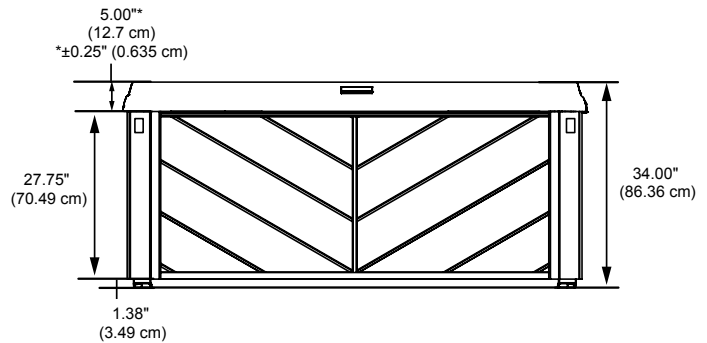


SIDE VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

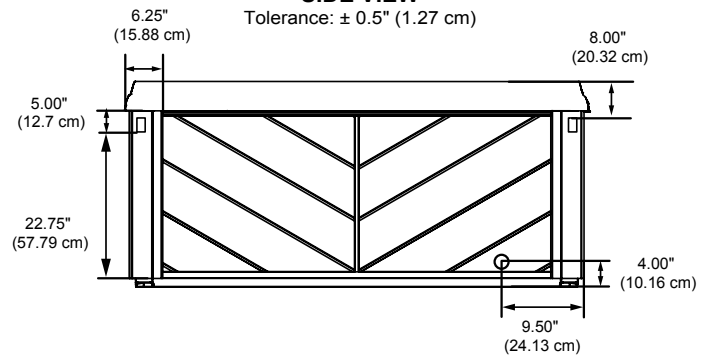

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

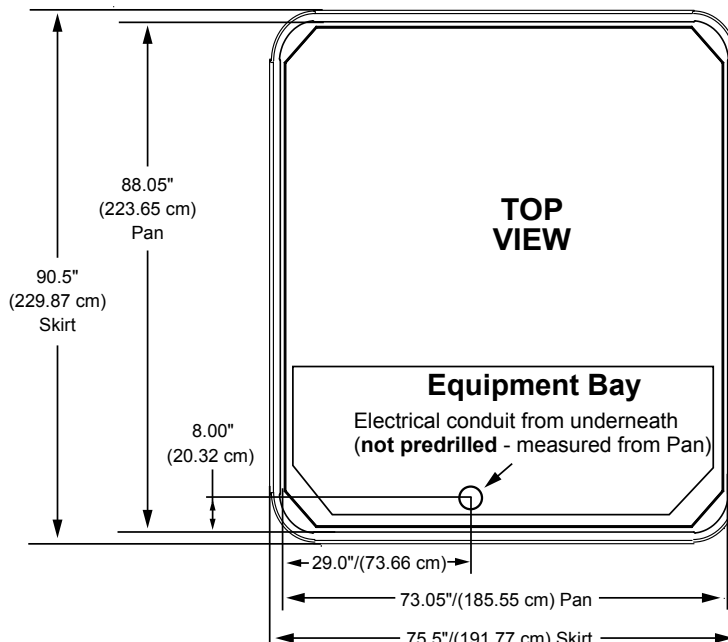

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice