

Kodiak Cold Plunge

Specifications

Lounge/Open	Lounge
Seating Capacity	1
Dry Weight (unit only)	327 lbs (148 kg)
Dry Weight (packaged)	397 lbs (180 kg)
Gallons	115 Gal (435 L)
Average Weight (unit and water)	1,286 lbs. (583 kg)
Temp Range	40°F-104°F (4.4°C-40°C)
Domestic Voltage	12A 120V (GFCI Cord)
Return Fitting	1 (circ)
Circ Pump	12VDC, 5.6A - 48 liter/minute max
Chiller	Refrigerant R32
Amount of Refrigerant Charged:	180g
Suction Fittings	2
Filtration Cartridge	Pleated (4 ft²)
UV	None
Ozone	None
Cabinet Material	Synthetic Grey
Cabinet Color	1
Frame	Metal
Shell	Acrylic
Deck	Synthetic
Flooring	Non Slip EVA
Insulation Sheet	Foil
Interior Light	Underwater Blending Multicolor
Built-in Exterior Drain	Drain Valve




Warranty

Acrylic Shell	5 years
PS Skirt	1 year
Chiller	1 year
Water Pump	1 year
Control Panel	1 year
Lights	1 year
Frame	1 year
Foam Pads	90 days

Dimensions

A	Length	87"	(221 cm)
B	Width	33"	(84 cm)
C	Height	28"	(71 cm)

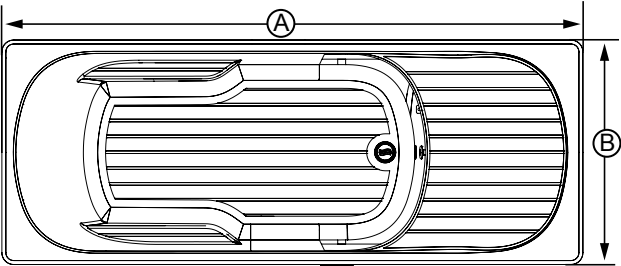

Note: Cabinet panels with ventilation slots require a 3 foot clearance

