

Jacuzzi J-435

Specifications

Seating Capacity.....	5-6 Adults
Dimensions	84" x 84" x 37.5" Front/43.5" Back, (213.5 cm x 213.5 cm x 95.25 cm Front/110.5 cm Back); For Complete Dimensions, See page 79
Dry Weight.....	822 lbs (373 kg)
Filled Weight (Average Fill).....	3,824 lbs (1,735 kg)
Water Capacity (Average Fill)	360 US gallons (1,363 Liters)
Filled Weight (Spa Volume)	4,492 lbs (2,037 kg)
Water Capacity (Spa Volume)	440 US gallons (1,666 Liters)
Electronic Controls	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
Pump 1.....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Pump 2.....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Circulation Pump.....	Yes, 8-Hour
Total PowerPro® Jets.....	45 (plus 2 IR Therapy Lights)
Seat A Jets	3 PowerPro® FX
Seat B Jets	2 PowerPro® NX2, 6 PowerPro® RX, 2 PowerPro® PX, 6 PowerPro® FX Small, 2 PowerPro® FX Rotational
Seat C Jets	1 PowerPro® FX Large Rotational
Seat D Jets	2 PowerPro® NX2, 4 PowerPro® FX Rotational, 4 PowerPro® FX, 2 IR Therapy Lights
Seat E Jets	2 PowerPro® RX
Seat F Jets.....	2 PowerPro® NX2, 3 PowerPro® MX, 2 PowerPro® FX Rotational
Footwell (G).....	4 PowerPro® FX Small
Massage Selectors	2
Air Controls.....	3, On/Off rocker switch air controller
Water Management System.....	One ProClarity® 40 ft² filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft² filter; Floating Weir; True™ Water System (Must order with SmartTub® option)
Export (50 Hz):	ClearRay Active Oxygen® System
LED Lighting	One waterfall with light, one underwater light, cupholder, massage selector lights, indicator light, and exterior lights (standard)
ProFinish™ Cabinet Colors.....	Modern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic Colors	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
Headrests	3
Waterfall	One with Independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
Heater:	North America (60 Hz): 5.5 kW, High Flow
Export (50 Hz):	High Flow, 2.7 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 220-240 VAC@ 1x32A, 1x20A/1x16A, or 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.
Warranty*.....	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year True™ Water System, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Special Features (Optional)	SmartTub® Module (Must order with the True™ Water Sytem)
Audio System (Optional).....	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm head-phone jack port; 4 premium speakers, a powered subwoofer




*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-435

Operation/Seat Depths

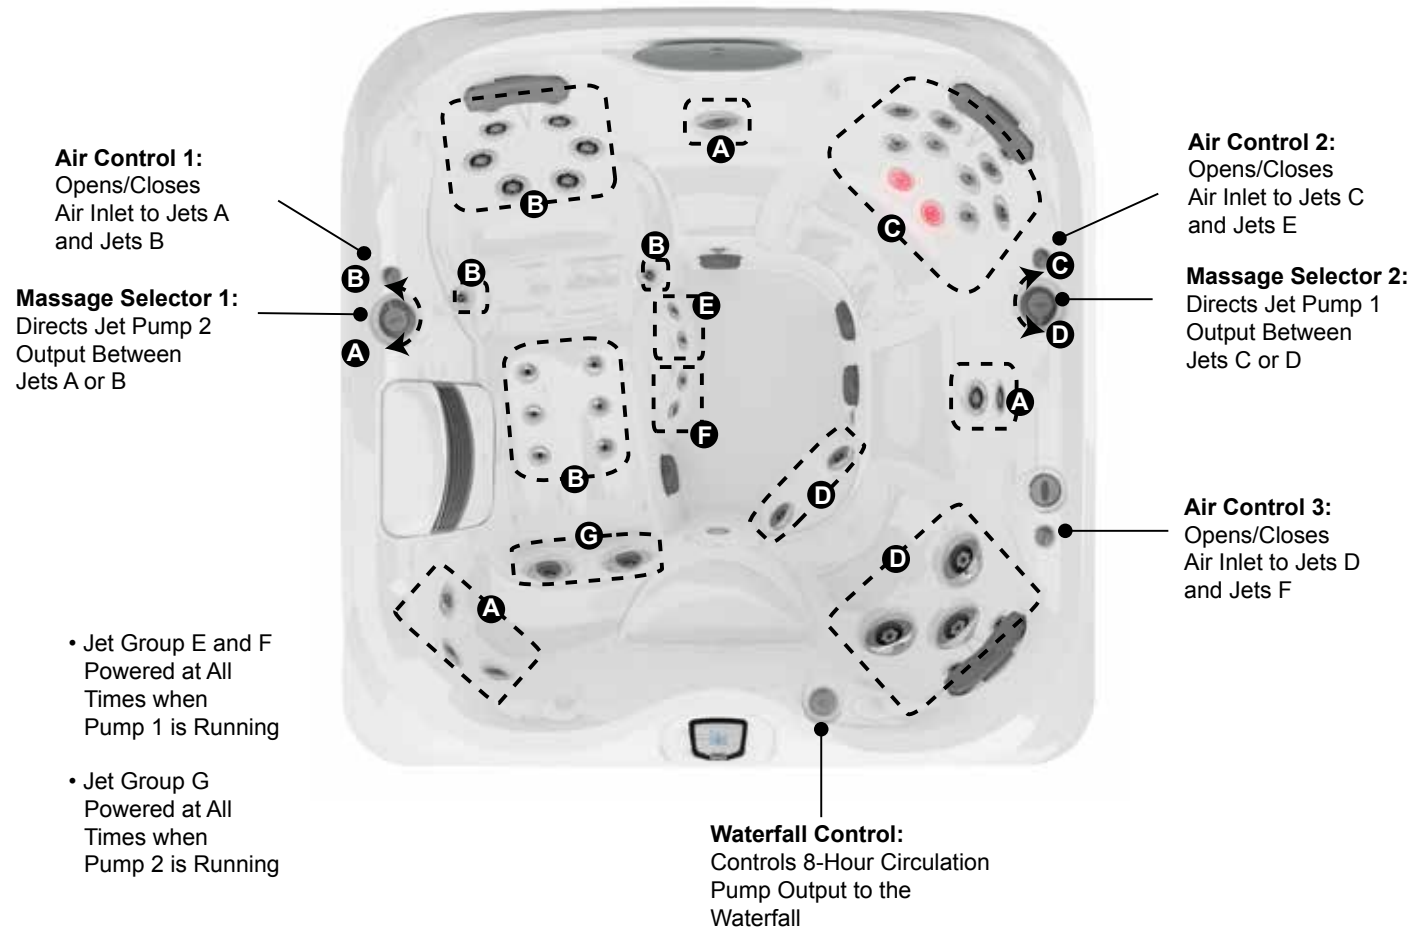

45 Total Jets (plus 2 IR Therapy Lights)




Spa Operation Subject to Change without Notice

Seat Depths

A = 17.75" (45.09 cm)
B = 27.75" (70.49 cm)
C = 29.00" (73.66 cm)
D = 23.00" (58.42 cm)
E = 30.00" (76.20 cm)
F = 23.50" (59.69 cm)

G = 25.50" (64.77 cm)
H = 33.50" (85.09 cm)
I = 20.50" (52.07 cm)




Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**



Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-435


Dimensions

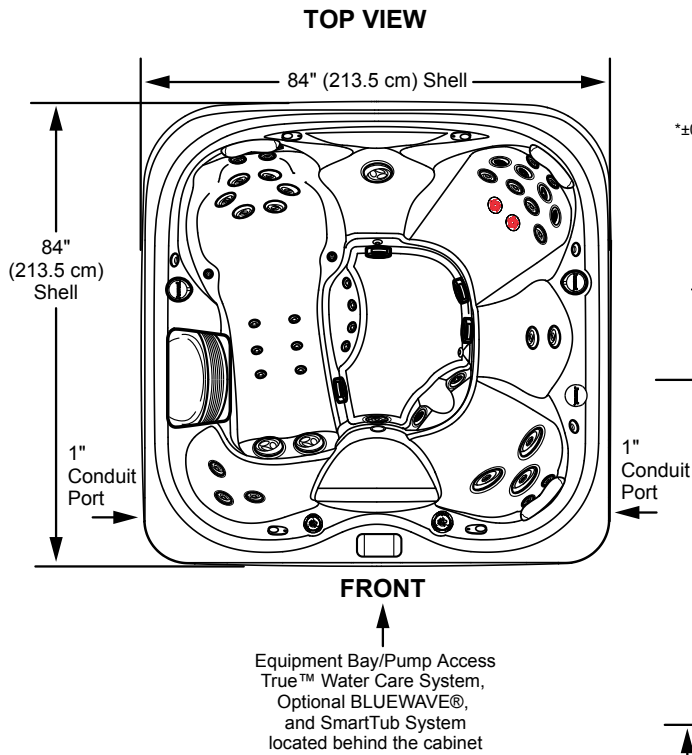


Important Panel Details

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.


FRONT VIEW
Tolerance: $\pm 0.5"$ (1.27 cm)

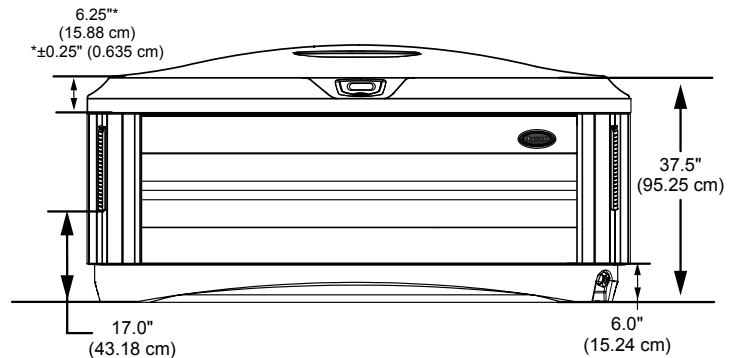

RIGHT SIDE VIEW
Tolerance: $\pm 0.5"$ (1.27 cm)

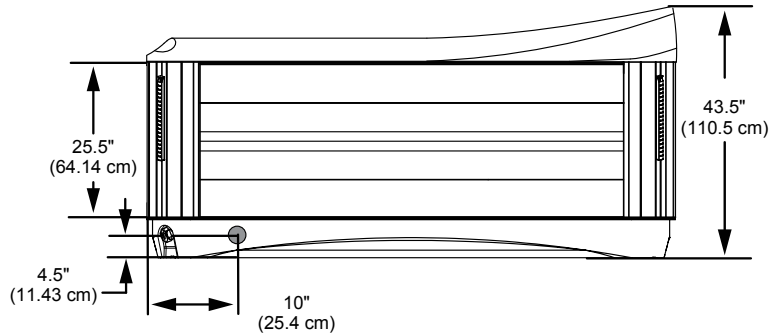

***IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.**

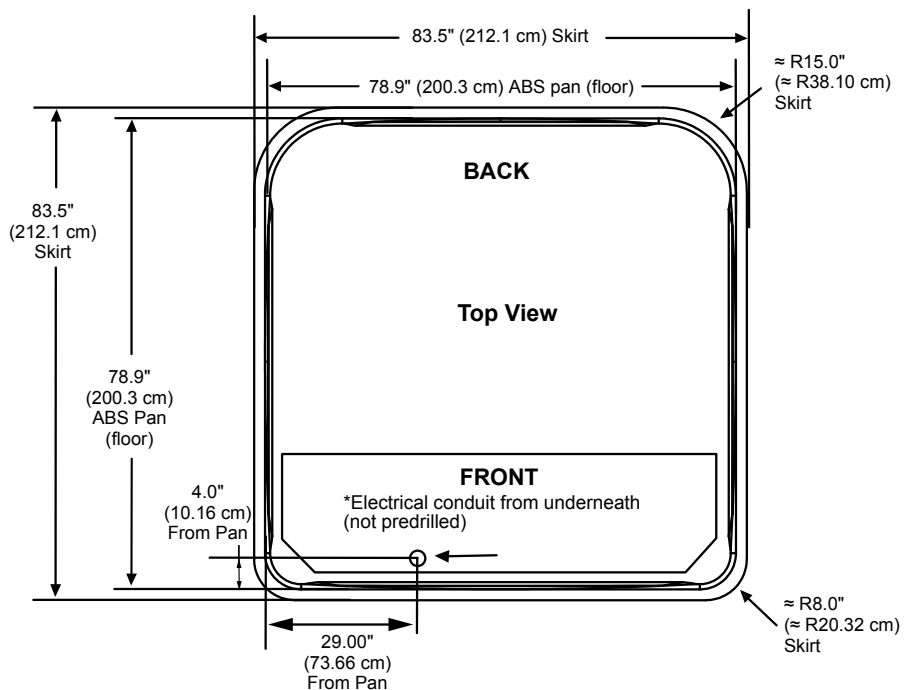

Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)